




QTP7527-12t

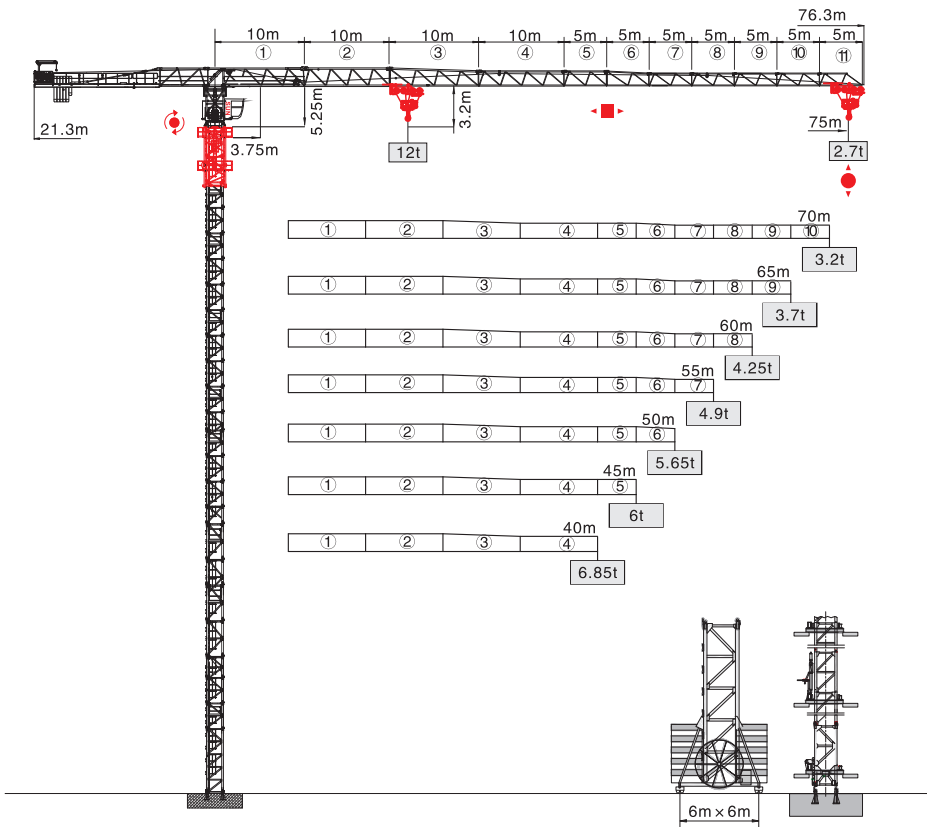

塔身截面 Mast 2m × 2m


固定式 Stationary

固定式 Stationary

行走式 Traveling


内爬式 Inner climbing

H L69B2

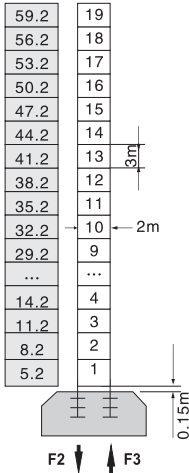


F2	● 228t	■ 251t
F3	● 171t	■ 192t
	87t	

H L68B1

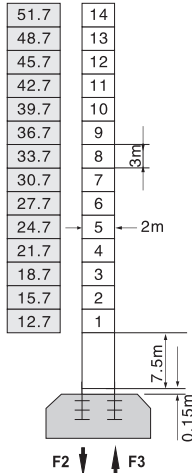


F2	● 218t	■ 243t
F3	● 164t	■ 186t
	79t	

H L68B1

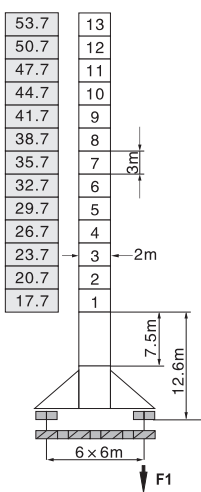

F1	● 165t	■ 182t
	90t	


H L68B1

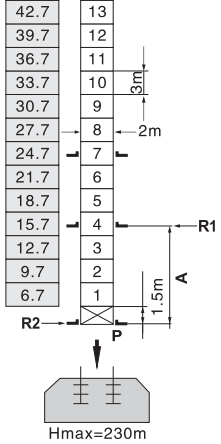

A	● 7m	■ 12m
R1	● 36.8t	■ 25.6t
R2	● 31.6t	■ 23.1t
P	● 116t	■ 116t
	84t	

- 工作状态 In service F=固定反力或轮压 Reactions
- 非工作状态 Out of service 自重 Total weight without load and counter weight

附着 Anchorage L69B2

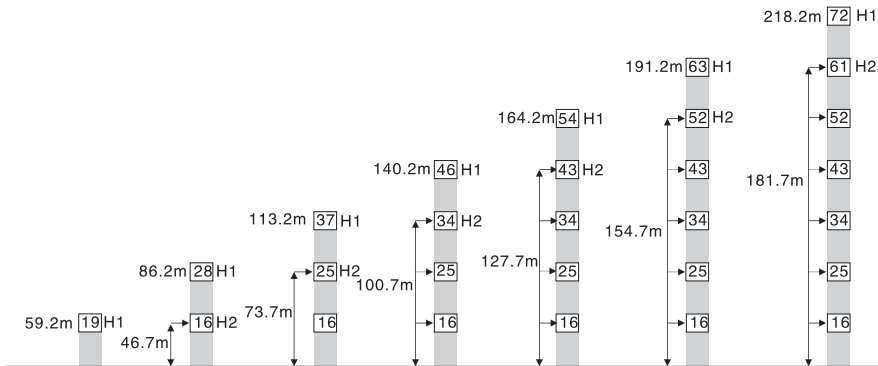


H1—塔机吊钩距地面的高度 Height under hook

H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground

① > 218.2m 请向我司咨询 Consult us

附着 Anchorage L68B1

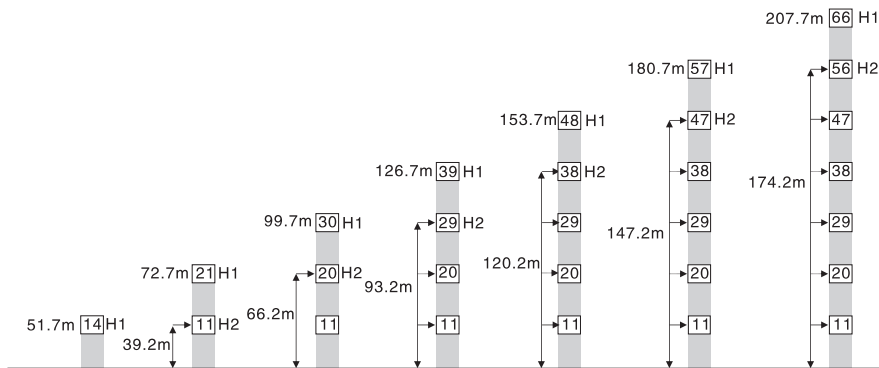

H1—塔机吊钩距地面的高度 Height under hook

H2—塔机附着位置距地面的高度 Height of anchorage frame to the ground





i > 207.7m 请向我司咨询 Consult us

载荷特性表 Load Diagrams








起重臂 Jib (m)	倍率 Fall	起重幅度 Range (m)	3.75~21.64	25	30	35	40	45	50	55	60	65	70	75
75	IV	起重重量 Load (t)	12	10	7.94	6.48	5.39	4.55	3.88	3.34	2.89	2.51	2.18	1.9
	II		6						5.35	4.68	4.14	3.69	3.31	2.98
70	IV	起重重量 Load (t)	12	10.63	8.46	6.92	5.78	4.89	4.19	3.62	3.14	2.74	2.4	
	II		6						5.69	4.99	4.42	3.94	3.54	3.2
65	IV	起重重量 Load (t)	12	11.05	8.8	7.21	6.03	5.12	4.4	3.81	3.31	2.9		
	II		6						5.92	5.2	4.61	4.11	3.7	
60	IV	起重重量 Load (t)	12	11.38	9.08	7.45	6.24	5.3	4.56	3.95	3.45			
	II		6						5.36	4.75	4.25			
55	IV	起重重量 Load (t)	12	11.71	9.35	7.68	6.44	5.48	4.72	4.1				
	II		6						5.52	4.9				
50	IV	起重重量 Load (t)	12	11.98	9.57	7.87	6.6	5.63	4.85					
	II		6						5.65					
45	IV	起重重量 Load (t)	12	9.75	8.03	6.74	5.75							
	II		6											
40	IV	起重重量 Load (t)	12	9.9	8.15	6.85								
	II		6											

配重配置表 Counter Weight

		5000kg	4300kg	2000kg	1300kg	 kg
75m	21.3m	3	1	1	–	21300
70m	21.3m	3	1	–	1	20600
65m	21.3m	3	1	–	–	19300
60m	21.3m	3	–	1	1	18300
55m	18.3m	3	1	1	1	22600
50m	18.3m	3	1	–	1	20600
45m	18.3m	3	–	1	1	18300
40m	18.3m	3	–	–	1	16300



机构特性 Mechanisms

机构名称 Name	机构型号 Model						功率 Power
		m/min	t	m/min	t		
起升 Hoisting 	75LVF30	m/min	t	m/min	t	600m 变频控制 Inverter Control	55Kw
		0-45	6	0-22.5	12		
		0-90	3	0-45	6		
变幅 Trolleying 	X185K	m/min	0-65			9Kw	
	DVF185	m/min	0-65		变频控制 Inverter Control	9Kw	
回转 Slewing 	RCV185	r/min	0-0.7			2×9Kw	
	RVF185	r/min	0-0.7		变频控制 Inverter Control	2×9Kw	
行走 Traveling 	18TVF	m/min	0-25		变频控制 Inverter Control	4×3.4Kw	
电网/Power Supply				380V/50Hz 440V/60Hz (±5%)			
供电容量/Necessary Power				102KVA/120KVA (traveling)			

※ 本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding.

For any technical information, please refer to the corresponding instructions.